

## Lexan\* Resin 3412R

### Europe-Africa-Middle East: COMMERCIAL

LEXAN 3412R is a high viscosity, 20% glass reinforced grade. It offers excellent flame retardancy and is especially designed for applications requiring high rigidity together with high heat.

TYPICAL PROPERTIES <sup>1</sup>	TYPICAL VALUE	UNIT	STANDARD
<b>MECHANICAL</b>			
Taber Abrasion, CS-17, 1 kg	17	mg/1000cy	SABIC Method
Tensile Stress, break, 5 mm/min	90	MPa	ISO 527
Tensile Strain, break, 5 mm/min	2	%	ISO 527
Tensile Modulus, 1 mm/min	6000	MPa	ISO 527
Flexural Stress, break, 2 mm/min	120	MPa	ISO 178
Flexural Modulus, 2 mm/min	5500	MPa	ISO 178
Hardness, H358/30	125	MPa	ISO 2039-1
<b>IMPACT</b>			
Izod Impact, unnotched 80*10*3 +23°C	35	kJ/m <sup>2</sup>	ISO 180/1U
Izod Impact, unnotched 80*10*3 -30°C	35	kJ/m <sup>2</sup>	ISO 180/1U
Izod Impact, notched 80*10*3 +23°C	7	kJ/m <sup>2</sup>	ISO 180/1A
Izod Impact, notched 80*10*3 -30°C	6	kJ/m <sup>2</sup>	ISO 180/1A
Charpy 23°C, V-notch Edgew 80*10*3 sp=62mm	6	kJ/m <sup>2</sup>	ISO 179/1eA
Charpy -30°C, V-notch Edgew 80*10*3 sp=62mm	5	kJ/m <sup>2</sup>	ISO 179/1eA
Charpy 23°C, Unnotch Edgew 80*10*3 sp=62mm	40	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy -30°C, Unnotch Edgew 80*10*3 sp=62mm	40	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy Impact, notched, 23°C	9	kJ/m <sup>2</sup>	ISO 179/2C
<b>THERMAL</b>			
Thermal Conductivity	0.22	W/m-°C	ISO 8302
CTE, 23°C to 80°C, flow	3.E-05	1/°C	ISO 11359-2
Ball Pressure Test, 125°C +/- 2°C	PASSES	-	IEC 60695-10-2
Vicat Softening Temp, Rate A/50	155	°C	ISO 306
Vicat Softening Temp, Rate B/50	147	°C	ISO 306

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
4) Own measurement according to UL.  
5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source, GMD, Last Update:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA. All information, recommendation or advice given SABIC Innovative Plastics IP BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection

\* Lexan is a trademark of SABIC INNOVATIVE PLASTICS HOLDING BV

© 1997-2009 SABIC INNOVATIVE PLASTICS HOLDING BV. All rights reserved

## Lexan\* Resin 3412R

### Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES <sup>1</sup>	TYPICAL VALUE	UNIT	STANDARD
<b>THERMAL</b>			
Vicat Softening Temp, Rate B/120	145	°C	ISO 306
HDT/Be, 0.45MPa Edgew 120*10*4 sp=100mm	144	°C	ISO 75/Be
HDT/Ae, 1.8 MPa Edgew 120*10*4 sp=100mm	139	°C	ISO 75/Ae
Relative Temp Index, Elec	130	°C	UL 746B
Relative Temp Index, Mech w/impact	125	°C	UL 746B
Relative Temp Index, Mech w/o impact	130	°C	UL 746B
<b>PHYSICAL</b>			
Mold Shrinkage on Tensile Bar, flow (2)	0.2 - 0.5	%	SABIC Method
Density	1.35	g/cm <sup>3</sup>	ISO 1183
Water Absorption, (23°C/sat)	0.29	%	ISO 62
Moisture Absorption (23°C / 50% RH)	0.12	%	ISO 62
Melt Volume Rate, MVR at 300°C/1.2 kg	6	cm <sup>3</sup> /10 min	ISO 1133
<b>OPTICAL</b>			
Haze, 2.54 mm	NA	%	ASTM D 1003
Refractive Index	NA	-	ISO 489
<b>ELECTRICAL</b>			
Volume Resistivity	>1.E+15	Ohm-cm	IEC 60093
Surface Resistivity, ROA	>1.E+15	Ohm	IEC 60093
Dielectric Strength, shorttime, 1.0mm	20	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 0.8 mm	33	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 1.6 mm	25	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 3.2 mm	16	kV/mm	IEC 60243-1
Relative Permittivity, 50/60 Hz	3	-	IEC 60250
Relative Permittivity, 1 MHz	2.9	-	IEC 60250
Dissipation Factor, 50/60 Hz	0.001	-	IEC 60250
Dissipation Factor, 1 MHz	0.01	-	IEC 60250

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
4) Own measurement according to UL.  
5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source, GMD, Last Update:

**PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA** All information, recommendation or advice given by SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products by the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection.

\* Lexan is a trademark of SABIC Innovative Plastics IP BV

© 1997-2009 SABIC Innovative Plastics IP BV. All rights reserved

## Lexan\* Resin 3412R

### Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES <sup>1</sup>	TYPICAL VALUE	UNIT	STANDARD
<b>ELECTRICAL</b>			
Comparative Tracking Index	150	V	IEC 60112
<b>FLAME CHARACTERISTICS</b>			
UL Recognized, 94V-0 Flame Class Rating (3)	1.5	mm	UL 94
Glow Wire Flammability Index 850°C, passes at	1	mm	IEC 60695-2-12
Glow Wire Flammability Index 960°C, passes at	1.6	mm	IEC 60695-2-12
Oxygen Index (LOI)	37	%	ISO 4589

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity.  
All properties, except the melt volume rate are measured on injection moulded samples.  
All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
4) Own measurement according to UL.  
5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source, GMD, Last Update:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA All information, recommendation or advice given SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection

\* Lexan is a trademark of SABIC Innovative Plastics IP BV

© 1997-2009 SABIC Innovative Plastics IP BV. All rights reserved

## Lexan\* Resin 3412R

### Europe-Africa-Middle East: COMMERCIAL

PROCESSING PARAMETERS	TYPICAL VALUE	UNIT
<b>Injection Molding</b>		
Drying Temperature	120	°C
Drying Time	2 - 4	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	290 - 320	°C
Nozzle Temperature	280 - 310	°C
Front - Zone 3 Temperature	290 - 320	°C
Middle - Zone 2 Temperature	280 - 310	°C
Rear - Zone 1 Temperature	270 - 300	°C
Hopper Temperature	60 - 80	°C
Mold Temperature	80 - 120	°C

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity.  
All properties, except the melt volume rate are measured on injection moulded samples.  
All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
4) Own measurement according to UL.  
5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source, GMD, Last Update:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA All information, recommendation or advice given by SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products by the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection

\* Lexan is a trademark of SABIC Innovative Plastics IP BV

© 1997-2009 SABIC Innovative Plastics IP BV. All rights reserved

Lexan® Resin 3412R

Europe-Africa-Middle East: COMMERCIAL


**CALCULATED FLOW LENGTH INDICATION**

**Moldflow® Radial Flow Analysis**

**Lexan® 3412R**

**Melt Temperature : 300°C**

**Mold Temperature : 90°C**

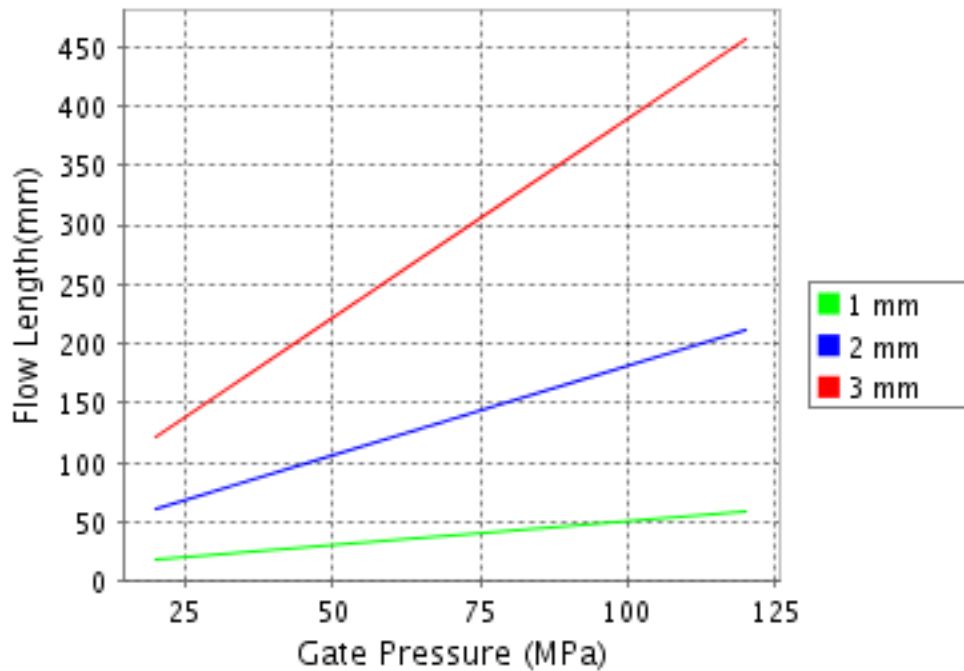

**Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.**

**® Moldflow is a registered trademark of the Moldflow Corporation.**

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
 3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
 4) Own measurement according to UL.  
 5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source, GMD, Last Update:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA All information, recommendation or advice given by SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products by the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection

\* Lexan is a trademark of SABIC Innovative Plastics IP BV

© 1997-2009 SABIC Innovative Plastics IP BV. All rights reserved